

[Order Now](#)[SDK](#)[Product Folder](#)[Support](#)

# FALCON-234MGS

2MP Monochrome UVC USB 3.0 Camera based on Onsemi AR0234 Sensor

Vadzo Falcon-234MGS is a 1080p monochrome global shutter USB 3.0 Camera based on Onsemi AR0234 Sensor. The camera delivers max resolution of 2MP and Video streaming of 1080p@60fps, 720p@60fps, and VGA@90fps. The camera comes with a M12/S-Mount lens holder that supports a 74DFOV lens by default. You shall be able to stream video in YUV and MJPEG format and capture images in BMP and JPEG format.

## Key Features

- Sensor Model: AR0234 Onsemi Sensor
- Max Resolution: 2MP
- Pixel Size: 3.0  $\mu\text{m}$  x 3.0  $\mu\text{m}$
- Shutter: Global Shutter
- Lens FOV: 74 DFOV
- Compliance: UVC, RoHS 3, REACH



## Applications

- **Warehouse Robotics:** Object Scanning, Document Scanning, OCR, Obstacle Detection.
- **Smart Surveillance:** Facial Recognition, Day/Night Video Recording, Smart Parking, Pedestrian Safety.
- **Retail Analytics & Automation:** Inventory Monitoring, Age Verification, Demography Analysis, Shelf Monitoring, Self-Checkout.

## INDEX

<b>1. Introduction</b> .....	3
<b>2. Camera Specifications</b> .....	3
<b>3. Supported Resolutions</b> .....	5
<b>4. Supported Camera Functions</b> .....	5
<b>5. USB 3.0 Interface</b> .....	5
<b>6. Status LED</b> .....	5
<b>7. General Purpose I/O Lines</b> .....	6
<b>8. Temperature and Humidity Specifications</b> .....	6
<b>9. Dimensions</b> .....	7
Board Top Side – 2D.....	7
Board Bottom Side - 2D .....	7

## 1. Introduction

Falcon-234MGS is a UVC Compliant USB 3.0 Fixed-Focus Global Shutter Monochrome camera based on Onsemi AR0234 sensor. The camera is designed to be backward compatible with USB 2.0 as well.

The camera incorporates the AR0234 Monochrome sensor from Onsemi. The Image sensor is integrated with the USB 3.0 controller to provide UVC Compliant USB 3.0 camera. The USB controller is also programmed to support HID Pipeline that shall support UVC extension functions that are not supported in the standard UVC drivers.

## 2. Camera Specifications

General Information	
Product Family	Falcon series
Camera Model	Vadzo Falcon-234MGS
Sensor	
Sensor	AR0234 Sensor from Onsemi
Sensor Format	1/2.6"
Pixel Size	3.0 µm x 3.0 µm
Max Resolution	2MP – 1920(H) x 1200(V)
Shutter	Global Shutter
Chroma	Mono
Camera Data	
Interface	USB 3.0 Gen1 Backward compatible to USB 2.0
Pixel Depth	8bit / 10bit
Output Format	Y8 and Y12
Exposure Control	Manual Control via software & Auto-Exposure
GPIO	6 pins. 1x Digital Input, 1x Digital Output, 3x NC and GND
Camera Hardware	
Lens	S Mount (M12 Standard)

USB connector	Type C
GPIO connector	Connector on-board: Wurth 665306124022 Mating connector: Wurth 665006113322
Power Supply	USB powered
Power Requirement	Max: 1.75 W at 5VDC Min: 1.05 W at 5VDC
Operating Temperature	-40 <sup>0</sup> C to 85 <sup>0</sup> C
Dimension	38mm (L) x 38mm (B) convertible to 32mm (L) x 32mm (B)
Weight	13 Grams (Without Lens)
<b>Camera Software</b>	
Video Resolutions	VGA, HD, and FHD
Video formats	Y8 and Y12
Still Image Resolutions	VGA, HD, and FHD
Image Capture formats	Y8 and Y12
Image Capture Modes	Software trigger
UVC Camera Controls	Brightness, Exposure, Gain
<b>Conformity</b>	
Conformity	UVC Compliant, RoHS 3, REACH

### 3. Supported Resolutions

<b>Resolution</b>	<b>Frame Rates (FPS) in USB 3.0 Mode</b>
	<b>YUV</b>
<b>640 x 480 (VGA)</b>	120
<b>1280 x 720 (HD)</b>	60
<b>1920 x 1080 (FHD)</b>	60

### 4. Supported Camera Functions

The List of functions supported by the Falcon-234MGS camera are:

- Resolution Control
- Image Format Setting
- Video Format Setting – Y8 and Y12
- Image Capture Software Trigger
- Gain – Auto & Manual
- Exposure – Auto & Manual
- White Balance – Auto & Manual
- Anti Flicker – 50Hz/60Hz

### 5. USB 3.0 Interface

The camera module's USB 3.0 connector is a standard USB Type C connector. It provides a nominal 5 Gbit/s SuperSpeed data transfer connection to supply power to the device and to transmit video data and control signals. The power supply must comply with the Universal Serial Bus 3.0 Specification. The nominal operating voltage is 5 VDC, effective on the camera module's connector.

Connection assignments and numbering adhere to the Universal Serial Bus 3.0 standard. USB Certified 3.0 Gen 1 or higher cables to be used. Vadzo does not recommend non-certified USB cables.

### 6. Status LED

Status LED's indicate the below:

- Red color indicates Device is powered ON with no Streaming.
- Yellow color indicates: Camera is currently Streaming.

## 7. General Purpose I/O Lines

GPIO lines are terminated through Six (6) pin socket connector from Würth Elektronik part number 665306124022. Refer to the below table for GPIO Connector Pin Numbering and Assignments.

Pin	Line	Function
1	Power	Do not use.
2	-	Do not use*
3	-	Do not use*
4	Input1	General Purpose I/O (GPIO) line with 1.8V tolerant directly connected to MCU  Preset: Input Line
5	Output1	General Purpose I/O (GPIO) line with 1.8V tolerant directly connected to MCU  Preset: Output Line
6	GND	Ground

*\*Vadzo engineering team shall be able to enable the IOs on the firmware level as per the end user technical requirements under the purview of Vadzo Imaging customisation program.*


Recommended mating connector from Würth Elektronik part number 665006113322.

## 8. Temperature and Humidity Specifications


Description	Specification
Operating Temperature	-40 <sup>0</sup> C to 85 <sup>0</sup> C
Storage Temperature	-40 <sup>0</sup> C to 85 <sup>0</sup> C
Humidity	20% to 80%, Relative, non-condensing.

## 9. Dimensions

### Board Top Side – 2D

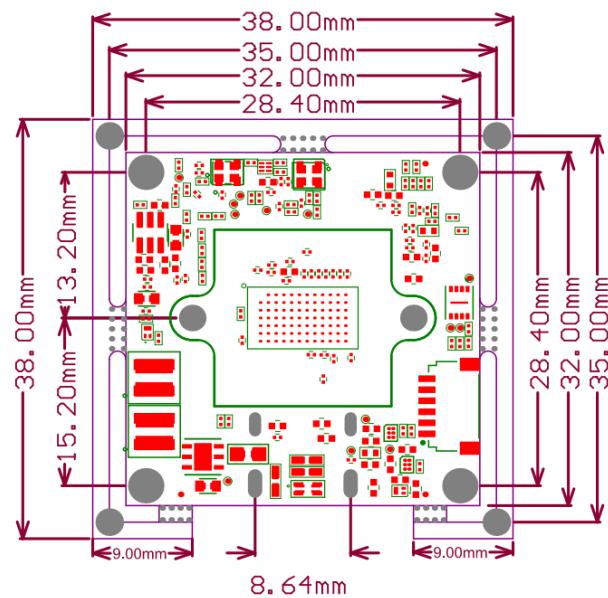

### Board Bottom Side - 2D

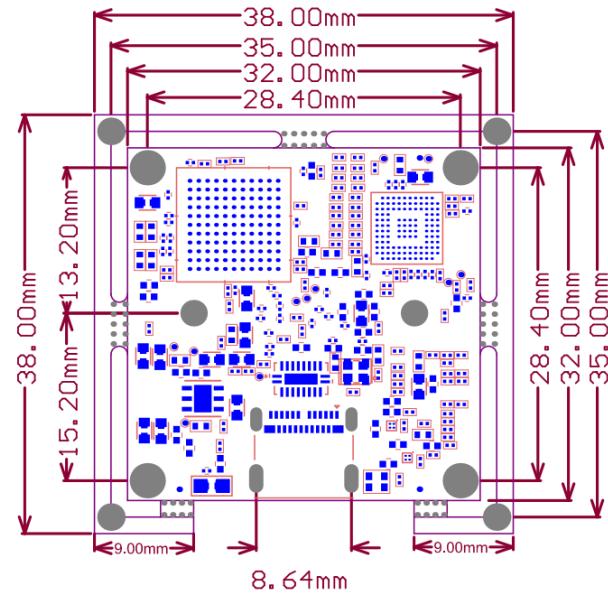

## IMPORTANT NOTICE AND DISCLAIMER

Vadzo Imaging products are sold by description only. Vadzo Imaging reserves the right to change the information in this document, including URL references and/or specifications is subject to change without notice. Customers should obtain the latest relevant information and data sheets before placing orders and should verify that such information is current and complete.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

THIS DOCUMENT IS PROVIDED AS IS WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION, OR SAMPLE.

All liability, including liability for infringement of any proprietary rights, relating to the use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

All trade names, trademarks, and registered trademarks mentioned in this document are the property of their respective owners and are hereby acknowledged.



*Copyright © 2017–2026 Vadzo Imaging. All Rights Reserved.*