

## 2MP HDR Color MIPI Camera based on Onsemi AR0233 Sensor

Vadzo Bolt-233CRS is a Full HD MIPI Camera based on Onsemi AR0233 HDR Sensor coupled with high-performance ISP. The camera delivers max resolution of 2MP and Video streaming of 1080p, 720p and VGA. Applicable in use cases such as telematics camera, fleet management camera, smart city solutions camera, smart security camera, video conferencing camera, etc. Bolt-233CRS has been integrated with solutions based on platforms such as Raspberry PI, Nvidia Nano, Nvidia XavierNX, etc.

### Key Features

- Sensor Model: AR0233 Onsemi Sensor
- Max Resolution: 2MP
- Pixel Size: 3.0  $\mu\text{m}$  x 3.0  $\mu\text{m}$
- Shutter: Rolling Shutter
- Lens FOV: 74 DFOV
- Compliance: RoHS 3, REACH



### Applications

- **Warehouse Robotics:** Object Scanning, Document Scanning, OCR, Obstacle Detection.
- **Telematics & Fleet Management:** Dashcam, Driver Monitoring, Cargo Monitoring Camera, Fleet Management.
- **Kiosk & Digital Signages:** Document Scanning, OCR, Barcode Reading, Facial Recognition, Demography Analysis.

## INDEX

- 1. Introduction** ..... 3
- 2. Camera Specifications** ..... 3
- 3. Supported Resolutions** ..... 4
- 4. Supported Camera Functions** ..... 5
- 5. MIPI Interface** ..... 5
- 6. Status LED** ..... 5
- 7. Temperature and Humidity Specifications** ..... 5
- 8. Dimensions**..... 6
  - Board Top Side – 2D ..... 6
  - ATR Board 2-Lane Bottom Side – 2D ..... 6
  - ATR Board 4-Lane Bottom Side – 2D ..... 7

## 1. Introduction

Bolt-233CRS is a MIPI Fixed-Focus HDR color camera based on Onsemi AR0233 sensor.

The camera incorporates the AR0233 Bayer sensor from Sony integrated with an on-board Image Signal Processor (ISP) to perform functions such as debayering, demosaicing, color correction, contrast correction, gamma correction, denoising, lens corrections, HDR, LFM and so on.

In addition to this, the ISP also supports Auto functions such as Auto-Exposure and Auto-White Balance.

This is a two-board camera solution that comprises of the camera module board and the adapter board. There are two variants of the adapter board to 2-Lane MIPI CSI 2 as well as 4-Lane MIPI CSI 2 interfaces.

## 2. Camera Specifications

| General Information |   |
|---------------------|---|
| Product Family      | Bolt series                                 |
| Camera Model        | Vadzo Bolt-233CRS                           |
| Sensor              |   |
| Sensor              | AR0233 Sensor from Onsemi                   |
| Sensor Format       | 1/2.5"                                      |
| Pixel Size          | 3.0 $\mu\text{m}$ x 3.0 $\mu\text{m}$       |
| Max Resolution      | 2MP – 2048(H) x 1280(V)                     |
| Shutter             | Rolling Shutter                             |
| Chroma              | Color                                       |
| Camera Data         |   |
| Interface           | 2-Lane MIPI CSI 2 & 4-Lane MIPI CSI 2       |
| Pixel Depth         | 8bit / 10bit                                |
| Output Format       | YUV422                                      |
| Exposure Control    | Manual Control via software & Auto-Exposure |
| GPIO                | 2 x NC                                      |

| <b>Camera Hardware</b>  |   |
|-------------------------|---|
| Lens                    | S Mount (M12 Standard)  |
| MIPI connector          | XF3M(1)-1515-1B (2 Lane) & 54548-2271 (4 Lane)  |
| Power Requirement       | Max: 1.45 W at 3.3VDC<br>Min: 0.80 W at 3.3VDC  |
| Operating Temperature   | -40 <sup>0</sup> C to 85 <sup>0</sup> C   |
| Dimension               | 38mm (L) x 38mm (B) convertible to 32mm (L) x 32mm (B)  |
| Weight                  | 13 Grams (Without Lens)   |
| <b>Camera Software</b>  |   |
| Video Resolutions       | VGA, HD, and Full HD  |
| Video formats           | YUV422  |
| Still Image Resolutions | VGA, HD, and Full HD  |
| Image Capture formats   | BMP   |
| Image Capture Modes     | Software trigger  |
| Camera Controls         | Brightness, Exposure, Contrast, Sharpness, Saturation, Gamma, Gain, White Balance, Denoising, LFM |
| <b>Conformity</b>       |   |
| Conformity              | RoHS 3, REACH   |

## 3. Supported Resolutions

| Resolution        | Frame Rates (FPS) in MIPI 4 Lane |
|-------------------|----------------------------------|
|                   | YUV                              |
| 640 x 480 (VGA)   | 120                              |
| 1280 x 720 (HD)   | 60                               |
| 1920 x 1080 (FHD) | 60                               |

## 4. Supported Camera Functions

The List of functions supported by the Bolt-233CRS camera are:

- Resolution Control
- Image Format Setting
- Video Format Setting – YUV422
- Image Capture Software Trigger
- Gain – Auto & Manual
- Exposure – Auto & Manual
- White Balance – Auto & Manual
- Anti Flicker – 50Hz/60Hz
- Contrast Control
- Gamma Control
- Hue & Saturation Control
- Sharpness Control

## 5. MIPI Interface

The camera module supports both 4-Lane MIPI CSI 2 as well as 2-Lane MIPI CSI 2 interface. Vadzo has designed the camera hardware such that it can be directly integrated with Raspberry PI as well Nvidia Jetson development kit via the 2-Lane MIPI CSI 2 interface. Vadzo has used the XF3M(1)-1515-1B from Omron for this interface.

Vadzo has integrated the capability of functioning in the 4-Lane MIPI CSI 2 bandwidth as well to ensure that you can achieve faster frame rates.

## 6. Status LED

Status LED's indicate the below:


- Red color indicates Device is powered ON with no Streaming.
- Yellow color indicates: Camera is currently Streaming.

## 7. Temperature and Humidity Specifications


| Description           | Specification                           |
|-----------------------|---|
| Operating Temperature | -40 <sup>0</sup> C to 85 <sup>0</sup> C |
| Storage Temperature   | -40 <sup>0</sup> C to 85 <sup>0</sup> C |
| Humidity              | 20% to 80%, Relative, non-condensing.   |

## 8. Dimensions


Board Top Side – 2D

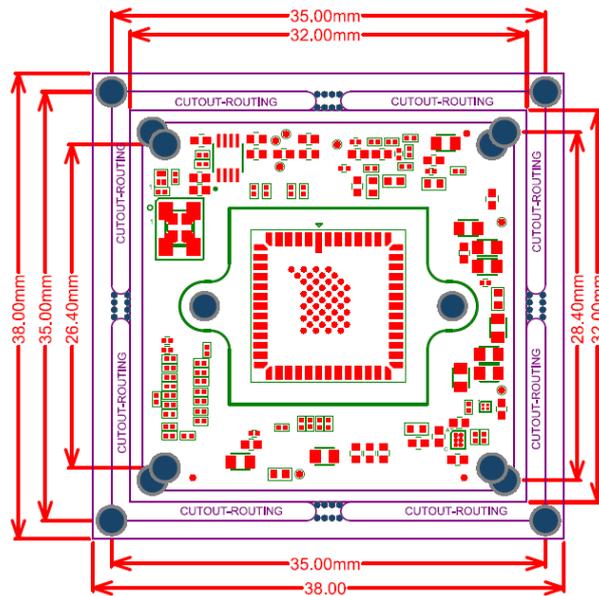

ATR Board 2-Lane Bottom Side – 2D

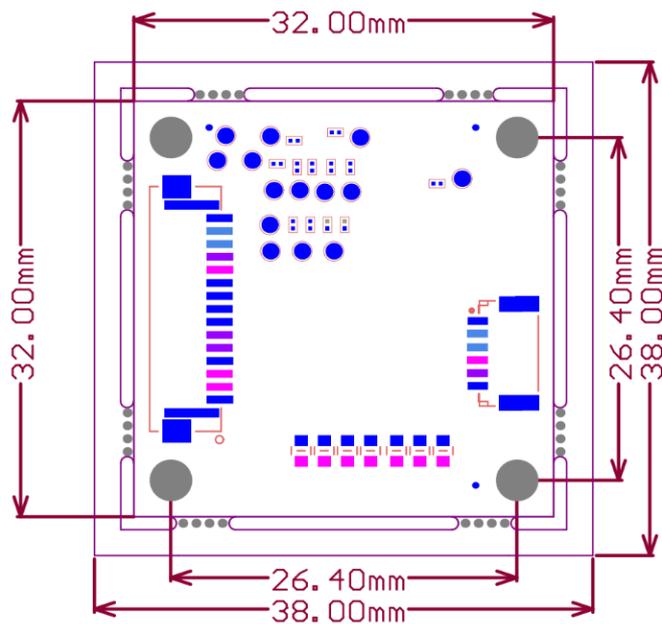

## ATR Board 4-Lane Bottom Side – 2D

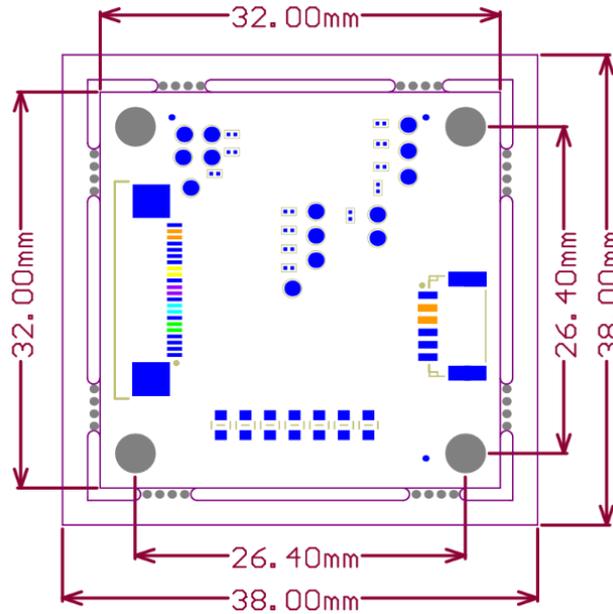

### IMPORTANT NOTICE AND DISCLAIMER

Vadzo Imaging products are sold by description only. Vadzo Imaging reserves the right to change the information in this document, including URL references and/or specifications is subject to change without notice. Customers should obtain the latest relevant information and data sheets before placing orders and should verify that such information is current and complete.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

THIS DOCUMENT IS PROVIDED AS IS WITH NO WARRANTIES WHATSOEVER, INCLUDING ANY WARRANTY OF MERCHANTABILITY, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR ANY WARRANTY OTHERWISE ARISING OUT OF ANY PROPOSAL, SPECIFICATION, OR SAMPLE.

All liability, including liability for infringement of any proprietary rights, relating to the use of information in this document is disclaimed. No licenses express or implied, by estoppel or otherwise, to any intellectual property rights are granted herein.

All trade names, trademarks, and registered trademarks mentioned in this document are the property of their respective owners and are hereby acknowledged.



Copyright © 2017–2026 Vadzo Imaging. All Rights Reserved.